

# MELO LIFT Model ML 8044

## DIMENSIONS

Wheelbase.....	120"	304 cm
Overall width.....	101"	256 cm
Overall height.....	94"	239 cm
Length less forks.....	239"	607 cm
Ground clearance.....	19"	48 cm
Total weight (approx.).....	24,200 lb	11,000 kg
Turn radius.....	141"	357 cm
Frame level.....	+/-11 Degrees	

## SPECIFICATIONS

Engine .....	Cummins, QSB 4.5 electronic, turbocharged diesel, 110 horsepower @ 2500 rpm
Transmission .....	Electronic powershift, 4 speed forward and 2 speed reverse Speed range - 3.7-22 mph 6-35 km/hr
Axles.....	Steerable outboard planetary
Brakes .....	Service - Differential mounted wet disc brakes - both axles Parking - Differential mounted S.A.H.R. wet disc
Tire.....	14.00 x 24 - 12 ply grader lug tubeless
Steering .....	2 wheel, 4 wheel, crab
Boom.....	3 section, welded construction Maximum lift height - 44' - 1341 cm Maximum forward reach - 30' - 910 cm Dual shaft type carriage Carriage rollback - 22 degrees Carriage forward tilt - 79 degrees
Forks .....	2 1/4" x 4" x 48" 5.7 cm x 10.2 cm x 122 cm
General .....	Fuel/hydraulic oil tank - 41 US gal - 155L Hydraulic pump - 36 gpm @ governed rpm 12 volt - 95 amp. alternator


## STANDARD EQUIPMENT

- Pilot-operated joystick boom & frame level controls
- Electronic dash and gauge instrumentation
- Hydraulic frame leveling
- Load capacity chart
- Automatic self-leveling forks
- 4 wheel drive
- Front axle mounted differential lock
- Engine block heater
- Quick disconnect carriage
- ROPS/FOPS operator compartment
- Lockable fuel cap and engine compartment
- Service and park brake activated transmission disconnect
- Anti-restart keyed ignition switch with neutral start
- Tilt adjustment of console mounted joystick controls
- Hydraulic tank mounted sight level and temperature gauge
- Swing up engine doors
- Rubber isolated cab mount
- Right-hand arm rest
- Adjustable suspension seat
- Anti-freeze
- Retractable seat belt
- Electric horn
- Anti-skid floor and steps
- Reverse warning alarm
- Yellow paint with black trim
- Overcentre lock valves on all hydraulic functions
- Electronic foot throttle
- External rear view mirrors
- Two stage air cleaner
- 4 wheel power steering
- Rear axle "stable-lock" cylinder
- Automatically activated S.A.H.R. parking brake
- Operator selectable, brake activated, automatic transmission disconnect system
- Tank mounted return filter
- Tank mounted hydraulic sump pickup filter

## OPTIONAL EQUIPMENT

- Various carriage/fork sizes
- Turn signals/lights
- Working lights
- Flashing beacon
- Fork positioner
- Auxiliary hydraulics
- Enclosed operator cab
- Side tilt carriage
- Swing carriage
- Dual batteries
- Material bucket
- Winch
- 12' Jib boom
- Foam filled tires
- Fenders
- Outriggers
- Mine code specification

## CAPACITY CHART

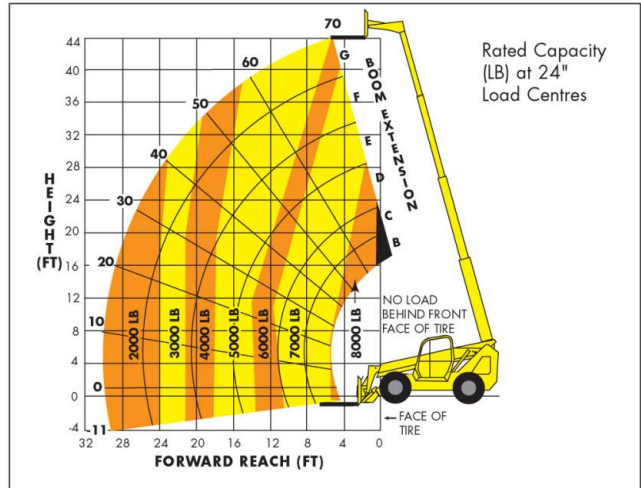

- Machine design complies with ASME/ANSI B56.6 stability requirements for rough terrain forklifts.
- For attachments consult factory for load rating.
- Read boom angle and boom extension, then determine allowable load from chart.
- Figures shown are stacking capacity with truck level on a firm surface and with properly inflated tires.
- Do not exceed rated loads as dangerous and unstable machine conditions will result.

## IMPORTANT

- All capacities rated on firm ground, with the machine steered straight and frame level.
- Always travel with boom retracted in the lowest possible position.
- Never position fork carriage behind front face of tire.

**Note:** Materials and specifications are subject to change without notice.

# MELO LIFT

## Zoom Boom

### MELO LIFT INC.

576 Fenmar Drive, Toronto, ON M9L 2S4  
Tel: (416) 741-9095 • Fax: (416) 740-5530  
Website: [www.melolift.com](http://www.melolift.com) • E-mail: [info@melolift.com](mailto:info@melolift.com)